



# Sustainable decommissioning of an offshore wind farm



Eva Topham\*, David McMillan

University of Strathclyde, UK

## ARTICLE INFO

### Article history:

Received 24 February 2016

Received in revised form

19 October 2016

Accepted 30 October 2016

Available online 2 November 2016

### Keywords:

Decommissioning

Marine renewable energy

Offshore wind energy

Offshore wind farms

Sustainable

## ABSTRACT

The offshore wind industry has historically focused on setting up new projects, with the decommissioning phase receiving little attention. This can cause future problems as decommissioning needs to be planned at the beginning to prevent complications that may arise, as it implies important operations and high costs. There are numerous features that make decommissioning a challenge, such as the marine environment, the technical limitations of vessels and the lack of specific regulations that determine what should be done, increasing the uncertainty of the process. Additionally, the unique characteristics of the sites involve exclusive optimal solutions for each project. This article analyses the main operation parameters that affect the decommissioning process, identifying the benefits and drawbacks of the influencing variables. A model is designed to compare different transportation strategies, searching for cost reduction. A decommissioning methodology is proposed based on this analysis, taking into consideration the technical aspects of the process, and minimising environmental impacts. The model forecasts that the predicted duration and costs of this process are not being adequately captured in site decommissioning plans.

© 2016 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

## 1. Introduction

Offshore wind farms are relatively new, and therefore owner/operators have been mainly concerned with improving installation techniques and achieving operational efficiency. Despite the potentially large costs, logistical difficulties and environmental impacts, decommissioning has been given little attention to date. This is an important matter because decommissioning is a significant part of any project, and should be considered from the very beginning, from the design stage, as if not done then, impacts can become more severe and costs can be higher than expected.

Decommissioning is the last phase in a project's lifecycle and can be considered as the opposite of the installation phase [1], where the principle “the polluter pays” applies [2], and ensures that the site is left in a similar condition as it was before the deployment of the project. The first offshore wind energy project to be decommissioned took place in 2016, Yttre Stengrud, a 10 MW project with five 2 MW turbines which operated for more than a decade [3], significantly less than the expected lifetime of 20–25 years [4]. The decommissioning of the next two offshore wind

farms has also been announced: Lely, a 2 MW project consisting of four 500 kW turbines which have been operating since 1994 [5] and Vindeby, the first offshore wind farm to be installed, a 4.95 MW pilot plant of eleven 450 kW wind turbines with gravity based foundations [6]. The owner/operator decided to decommission the wind farm after 25 years of operation, reaching the predicted number of operating years [7].

An important early observation is that the requirements of a decommissioning scheme are unique to each site, when referred to the operating procedures regarding the site characteristics and the time, the type of structures involved, the equipment used, or the market conditions and contractual terms. On the one hand, this complicates the development of a general methodology that could be applied to any wind farm. On the other hand, the majority of offshore wind farms that will be decommissioned in the next decade will be monopile foundations, in relatively shallow waters (less than 50 m), and with few small sized turbines, which will give the opportunity for decommissioning teams to learn in “easy” environments.

It is highly likely that, before a complete dismantling of the site, repowering or refurbishment options will be studied by the owner/operator. Repowering involves the replacement of the existing turbines into more powerful ones, needing less for the same capacity [8] and after having proof that the site is ideal for exploiting wind energy that the site. It is sometimes taken into account since

\* Corresponding author. C/Moratín 3, Portal 7, 5<sup>o</sup>B, Las Palmas de Gran Canaria, Spain.

E-mail address: [eva.topgon@gmail.com](mailto:eva.topgon@gmail.com) (E. Topham).

the very beginning and not as a final decision, and so the seabed is leased for twice as long the usual (40 or 50 years instead of 20–25). Refurbishment involves the replacement of minor elements of the project such as the drivetrain and the rotor and keeping if possible, the tower, foundations and cables. This would allow existing projects to be updated to increase energy production [8]. For the Yttre Stengrund project refurbishment was considered, but due to the difficulty of getting hold of spare parts and the huge costs involved in upgrading the turbines and gearboxes, it became financial and technically unviable and the decision to decommission became relatively straightforward [9].

With the installation of offshore wind farms increasing rapidly, future decommissioning will become an important issue for the industry.

## 2. Literature review

In the coming decade, nearly 10 wind farms will need to be repowered or decommissioned [10]. Fig. 1 shows the evolution of the predicted decommissioning in the offshore wind industry for the next 30 years (for the existing plants), taking into account that the expected designed life will be of about 20 years:

Decommissioning is referred to in this paper as all the measures performed to return a site close to its original state as is reasonably practicable, after the project's lifecycle reaches to an end. The basic components that need to be removed in an offshore wind farm consist of: wind turbines, foundations and transition pieces, sub-sea cables (export and inter-array), meteorological masts, offshore substations and onshore elements as well as any existing scour material [11]. It is important to know what will be done with each of the above mentioned parts before the operations start: if they can be re-used or recycled as a first option, or disposed as final option. In the UK alone there are more than 1500 offshore wind turbines, 21 offshore substations, 27 meteorological masts and 58 export cables that one day will need decommissioning [12], with more capacity likely to follow.

As decommissioning is a relatively new topic, there is not much legislation on it. Therefore a variety of options exist and will vary

depending on the country [13]. They can range from complete removal of the different elements and their re-usage or recycling where possible, or appropriate disposal, or their left in situ after operation is ceased [2].

### 2.1. Methods for addressing decommissioning

It can be assumed from analysing the onshore wind sector and the offshore oil and gas industry, that decommissioning offshore wind farms will involve mixture of techniques adapted from both sectors. From onshore wind, the procedures used to remove the elements and from the oil and gas industry [14], the specialised vessels required to operate in challenging ocean conditions.

However, unlike offshore decommissioning in the oil and gas industry, where service providers have accumulated sufficient experience to enable them to carry out the works rapidly [15], decommissioning offshore wind turbines requires a much larger spatial and temporal scale. As a result of these differences, planning will be more challenging, with actions highly dependent on weather conditions. This will have direct repercussions on the final costs of the operation [16].

In general, it is found that the schemes being proposed do not have consistent coverage of all aspects of the decommissioning problem, and there are no standard methodologies which have yet emerged.

## 3. End of life of a wind farm

The designed lifetime of an offshore wind farm is expected to be 20–25 years. During the design stage, considerations should be taken to ease and reduce the decommissioning costs. In most jurisdictions, a report specifying how the decommissioning will be carried out (decommissioning programme) needs to be prepared and submitted during the project management of a wind farm, so that the permission for constructing is gained [17].

The operations chosen will depend on the site's specific factors such as the foundation type, the specialised equipment and vessels available, the distance to ports, the water depth and the weather

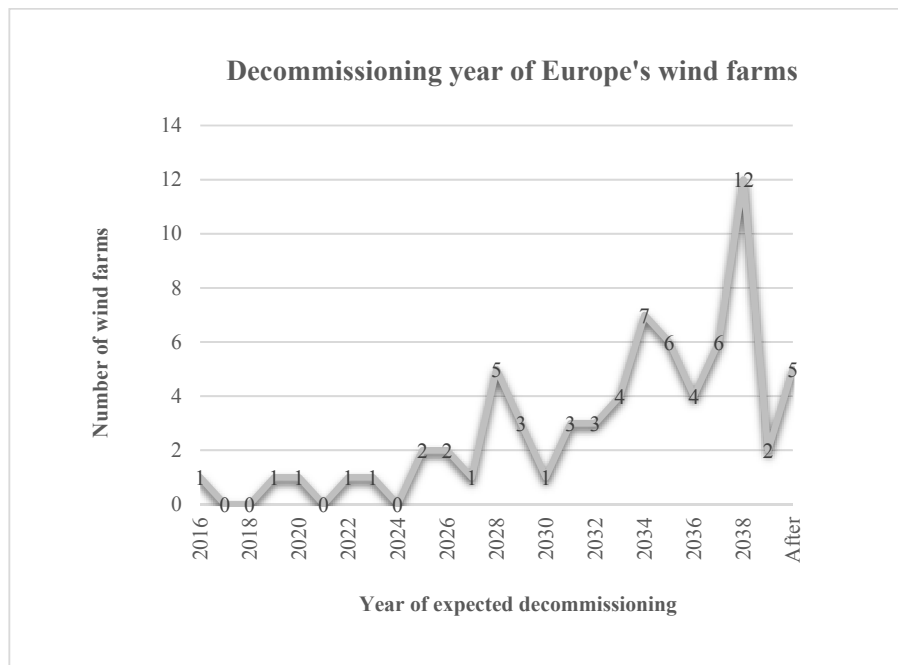


Fig. 1. Expected year of decommissioning of existing offshore wind farms. Source: Authors analysis based on [10].

conditions. The main scope is to transport structures as complete as possible, simplifying the operations offshore and reducing the time and economic expenditure. This is because offshore lifting is risky and dependant on wind speed, so the preference should be to maximise onshore disassembly [18].

The decommissioning of an offshore wind farm can be divided into three different phases:

- Project management and planning, where the operations are scheduled taking into account the time and costs involved, and trying to achieve the most efficient and sustainable solution.
- The removal of the structures themselves.
- Post decommissioning processes such as the destination of the removed elements or the monitoring of the sites' recovery.

Repowering can also be considered as a type of decommissioning but with the subsequent installation of more powerful wind turbines (heavier) trying to keep the majority of the electrical system (cables and substations), reducing the capital costs of the new project. The lifetime of the foundations will depend on the type and the loads it receives, and can be projected to last over 100 years for gravity bases [19]. On the electrical side, array and export cables (transmission cables) could last more than 40 years, and the transformers 35 [20]. For a real example, the currently operating Nysted project commissioned in 2003, the prevision was durations up to 50 years for both foundations and transmission cables [21] [22]. Taking these lifetimes into consideration, there are two repowering options available:

- **Partial repowering (Refurbishment).** Installing minor components (depending on the case) such as rotors, blades, gear-boxes, drivetrains, power electronics and/or towers.
- **Full repowering.** Replacing old turbines with newer, bigger units. Larger foundations can be required due to the heavier weights.

This decision depends on factors such as the site, the size of the project, the regulations applicable, the power price and operating costs, the extent of reusable infrastructures, and the expected profitability of the repowered project compared to the actual market [23]. Moreover, there is still not enough experience on precise estimation of remaining useful life of offshore wind components.

Fig. 2 displays the different phases involved in the decommissioning of an offshore wind farm. The boxes on the left define the 3 main stages (blue), middle boxes state the factors that influence these (green), and the ones to the right (orange) are sub-elements affecting the previous ones:

### 3.1. Elements to remove

The structures that constitute a wind farm require different actions to be removed and will usually require specific equipment.

#### 3.1.1. Turbines

Wind turbines should be entirely removed from the site and then disassembled onshore. The process begins de-energising and isolating the turbine from the grid. A heavy lift vessel or dynamic positioning vessel will be usually used, so it has to be mobilised to the location. As there are different methodologies used to install a wind turbine, there will also be several ones to disassemble it. The procedure performed will depend on the size and weight of the turbine, and will determine the lifting capacity and vessel's deck space. The majority of procedures proposed are the reverse of the installation techniques practised to date [19]. The disconnection

procedures of the elements involved in a wind turbine will differ, including the location of cutting cables.

From the different publically available decommissioning programmes [24–31], a summary table of preferred methods has been created (Table 1).

The turbines' specifications have been taken from the manufacturers' websites. Table 1 shows that the Siemens SWT-3.6-107 is the preferred installed turbine, and that the heaviest individual part to lift is the nacelle of the 5 MW 5M Senvion turbine. If the turbine was lifted as one piece, the heaviest case would again be the 5M Senvion turbine, with a total weight of 661 tonnes.

To start with the process, liquids such as gear or motor oils and any other chemicals that can be present, either can be collected and removed from the turbine for a later satisfactory treatment, or left inside the nacelle to minimise spillage risk and be collected once onshore. Bolts will be removed using normal methods or with angle grinders and plasma cutters if the first option is not possible [28]. Interconnecting cables to adjacent structures need cutting, but it will depend on the method chosen. While the tower is being lifted, the foundation is prepared for removal. The vessel necessary will be reliant on the removal option performed: a self-propelled vessel that fills its deck capacity returns to port, or a smaller jack-up for lifting procedures and barges used for transportation.

The best methodology will involve a reasonable operating time, with reduced risk to personnel (so containing a considerable number of heavy lifts) and that is economical to perform.

#### 3.1.2. Transition piece

The transition piece is the structure connecting the lower part of the turbine tower to the foundation, usually by means of a bolted flange connection. It contains elements such as J tube cable guides, access ladders and platforms [30], and will usually weigh around 300 tonnes [29]. The cables interconnecting the turbine's tower will be disconnected and cut, and then the connection to the foundation, making the lifting operation possible. A cutting tool needs to be fitted under the airtight platform of the transition piece while the J-tubes are cut. The cutting of the transition piece will start when the crane is in position to support the load [26]. Another option is to lift the transition piece all together with the foundation [29], but this means a lifting of a large weight of around 1000 tonnes (which will depend on the type of wind turbines the wind farm has), requiring specialised cranes and extreme safety measures.

#### 3.1.3. Foundations

The operations performed will mainly depend on the type of foundation. Specialised vessels are required due to the heavy lifting as consequence of the high weight of the foundations. As a general rule, after the removal of the J-tubes, internal access to the foundation is gained. A cutting method is then used to take out the external J-tubes and cut the foundation where it has been decided in the decommissioning programme, making lifting possible [28].

There are two removal options proposed: the complete removal of the foundation, or the cutting from a certain depth below the mud line and leaving the rest in situ, so that it will not disturb the site's activities [29].

Cutting and leaving in situ the rest is usually the preferred option as it reduces the risks, it is more economical to perform, and the site is disturbed less. Landfilling will be necessary to cover the hole left after the foundation is removed [28]. The foundations' removal operations will be fairly dissimilar depending on the type of foundation. This is expanded below.

**3.1.3.1. Monopiles.** First of all, each pile footing is inspected and it is decided whether lifting attachments are needed. This is done by

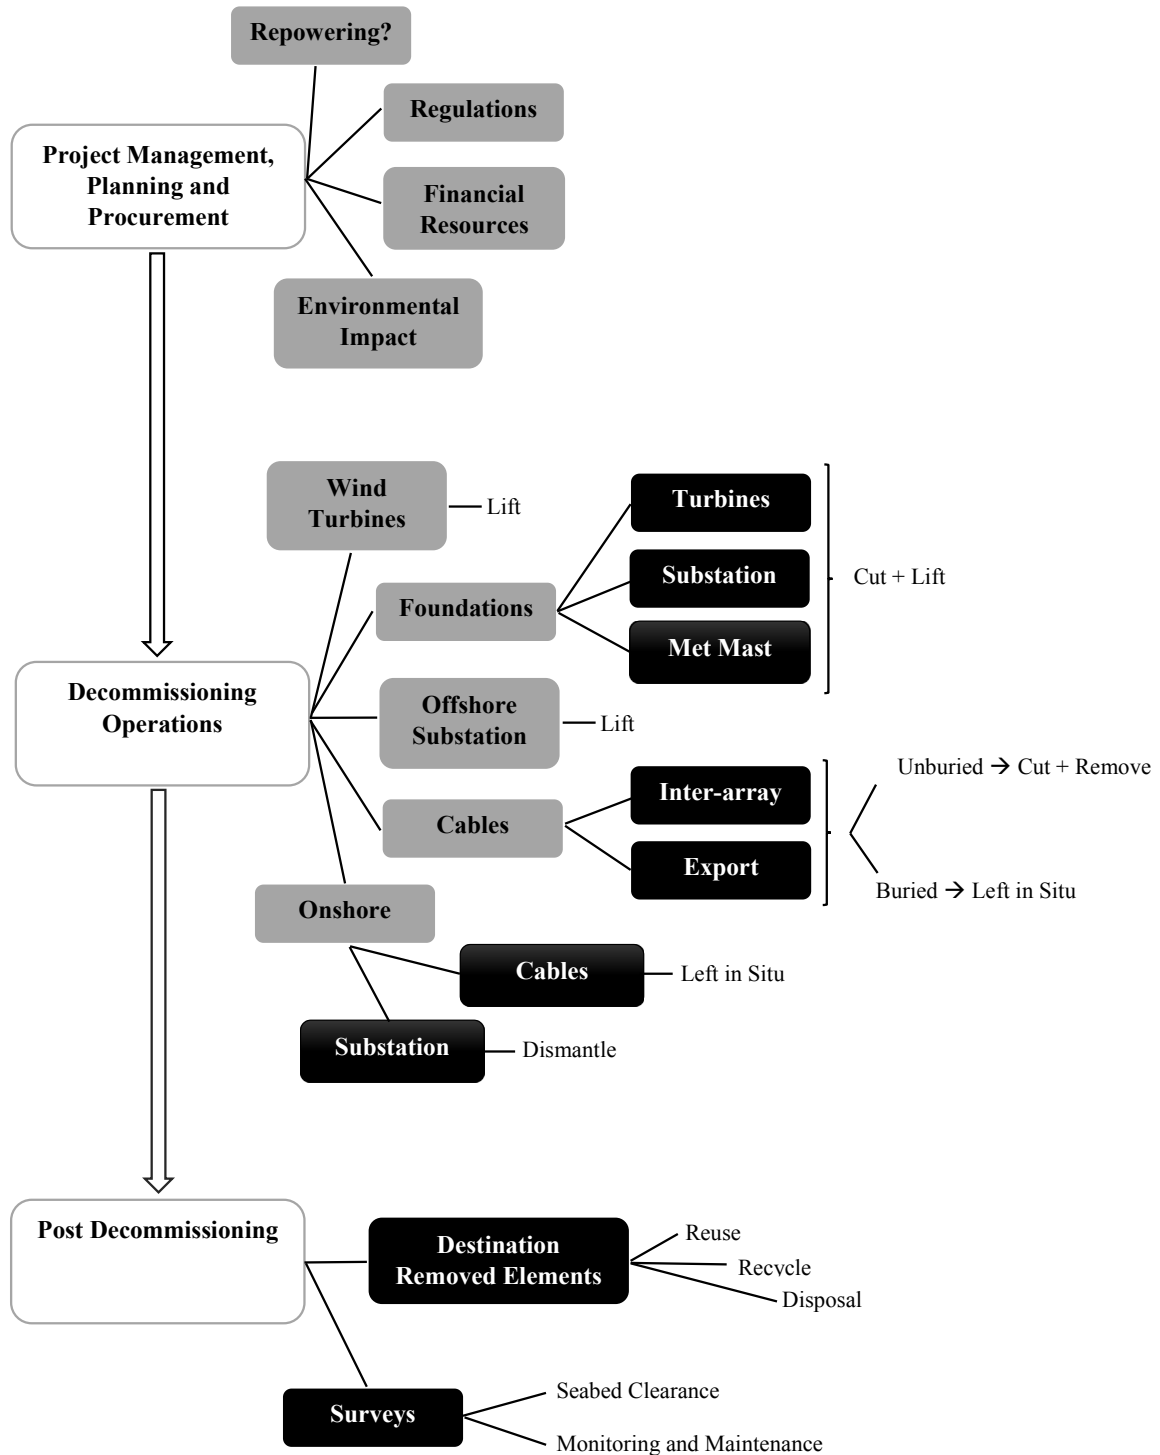


Fig. 2. Decommissioning process breakdown. Source: Authors analysis.

either remotely operated vehicles (ROVs) or divers. The chosen vessel will be mobilised to the site, and can be a floating crane, jack-up barge or special offshore unit with stabilising legs [28]. If the foundation is covered with scour protection, it has to be removed, allowing access for the cutting process. The excavation can be done with a sea trencher (or equivalent) [28]. The crane hooks from the vessel are positioned and attached to the lifting points of the foundation. The piles are cut below the seabed, but the distance will depend on the type of seabed, and the wind farm's

decommissioning programme (usually a few meters beneath the mud line), so excavation equipment will be necessary.

The size of the piles, the penetration depth into the seabed and its weight makes it very complex to remove the entire structure, involving big risks to personnel, and great environmental impact due to deeper excavation and disturbance. Moreover, specialised equipment is required during longer periods, which means it is a more expensive and a less practical option than cutting [30]. The further down into the seabed the monopile is cut, the more

**Table 1**  
Methods proposed in the decommissioning programmes. Source: Authors Analysis [24–31].

Wind Farm	Gunfleet Sands	Thanet	Lincs	Ormonde	Sheringham Shoal	Greater Gabbard	Gwynt y Môr	Dogger Bank Teesside A& B
<b>Description</b>	3 Blades Individually, Nacelle and Hub, Tower	1 Blade, Bunny Ear Rotor and Nacelle, Tower	3 Blades Individually, Nacelle and Hub, Tower	–	3 Blades Individually, Hub and Nacelle, Top Tower, Bottom Tower	Rotor, Nacelle, Tower	Rotor, Nacelle, Top Tower, Bottom Tower	Reverse Installation
<b>Turbine</b>	SWT-3.6-107	V90-3 90 m, 41	SWT-3.6-120 120 m, 5M 126 m, 130		SWT-3.6-107 107 m, 95	SWT-3.6-107	SWT-3.6-107	?
<b>Rotor</b>	107 m, 95 tonnes	tonnes 70	100 tonnes 125	tonnes 325	tonnes 125 tonnes 255	107 m, 95 tonnes	107 m, 95 tonnes	
<b>Nacelle</b>	125 tonnes 255	tonnes 285	tonnes 210 tonnes	tonnes 206	tonnes	125 tonnes 255	125 tonnes 255	
<b>Tower</b>	tonnes	tonnes	tonnes	tonnes		tonnes	tonnes	

expensive and risky it becomes.

The cutting methods proposed are usually either diamond wire cutting or water jetting (with a remotely operated high pressure water/grit tool) [24], but the one that damages the least should be used. Any debris found needs to be removed too. The detached foundation is then loaded onto the chosen transportation vessel, and shipped shore when the vessel has full capacity.

**3.1.3.2. Gravity.** There is a conflict on what to do with this type of foundation. A marine habitat will have established around the foundation when it is time to decommission, so there are two options: to leave the base of the foundation and cut the tubular section, or to remove it entirely. The second option will be compulsory if it implies a navigational hazard or there is an environmental preference.

The operations will start with ROVs or divers, as done with the monopile foundations, establishing the base structural integrity and placing the lifting attachments if required. The ballast from the base has to be removed and disposed, and so the mobilisation of a vessel capable of suction dredging is essential, inspecting with ROV's or divers that it is correctly done. Below the foundation there are compacted sediments that need to be disaggregated, enabling the foundation to be lifted out from the seabed. Once this is done, it will be loaded onto a transportation vessel. The seabed will be inspected searching for debris to remove [31].

**3.1.3.3. Jacket.** This structure can be lifted in a single lifting operation by cutting through each of its legs at a considerable level below the seabed. The legs consist of a pile driven into the seabed, a stub pipe at the bottom of the structure, and grout filling the space between them. Lift rigging needs to be installed from the jacket to the crane vessel before the legs are cut, which is usually done with a diamond wire cutting tool and with the help of ROVs (in order to minimise risks to safety). Excavation on the seabed is required to reach the location of cutting. Once the four legs are cut, the structure can be completely lifted and loaded onto a transportation vessel. While onshore, the steel can be recycled [27].

**3.1.3.4. Bucket/suction.** Regarding this type of foundation, a pump system is used to apply pressure inside the buckets and enables the release and extraction of the foundation from the seabed. The pumping of seawater or ballast from inside the foundation makes the structure buoyant, easing the process of capture onto a vessel for its later transportation [31]. Moreover, it has less environmental disruption due to no excavation or cutting requirements and the foundation can be completely removed.

#### 3.1.4. Offshore substation

The structure can be divided into two parts: the topside, and its foundation. The topside is transported onshore as a single

structure, and can be filled either with oil or resin, so it first has to be emptied reducing the potential risk of spillage [28] or safely contained [26]. The techniques developed will be alike for the turbines. It is important to assess any potential hazard or pollutants that could appear during the operation, as well as mitigation procedures, to allow their elimination.

The mobilisation of a decommissioning vessel capable of lifting the topside, and then its foundation is necessary. The topside will usually be the heaviest component of the farm [28]. When the vessel is ready, the first step is to disconnect the substation from the grid and de-energise it. Lifting points need to be installed followed by cutting the welded stab-in connections between the substation and the foundation, so that both structures can be lifted separately. Once they are loaded onto the vessel, they can then be transported onshore to correctly process them.

#### 3.1.5. Meteorological mast

The meteorological mast will be decommissioned using a similar process to the turbine's tower, and its foundation will depend on the type, as it was previously mentioned [29].

#### 3.1.6. Subsea cables

Subsea cables include both inter-array cables and export cables. They are usually buried into depths of more than a meter below the seabed [31], which will not pose safety risks for marine users and have limited environmental or pollution impacts [28] – although this depends on the cable technology adopted.

Cables can be partially or wholly removed, but this will generally depend on if the cable is buried or not, as the total removal of covered cables will involve extreme costs. Monitoring is important so that cables do not become exposed, and if this happens, appropriate burial actions are carried (using ROVs) [28].

It is possible to consider that the recovery is necessary only in some areas (cable crossings), and so the process starts with locating the cables (which may involve use of ROVs). Flow excavation and grapnels can be used to raise the cables from the seabed, cutting the required sections, and weighting and returning the remaining ends to the seabed, or by lifting cable ends onto a retrieval vessel where they are spooled onto a drum. If subsea trenches are formed, they will be naturally filled by tidal action [24]. The cables will be cut as near as possible from the foundation, burying the ends to a depth of around 1 m, and minimising disruption on the marine habitat and seabed [29]. The cables are transported onshore for suitable treatment.

The complete removal is considered to cause substantial damage and disruption to the seabed given the extensive length of the cables [32]. There would be need for excavation to pull them out of the trench, and then cutting, which involve high costs [29]. Leaving the cables in situ and well buried is therefore the best opportunity suggested till date, though this may require some study of marine

current action to establish the risk of the cables becoming exposed.

### 3.1.7. Scour protection

Marine life will have flourished around scour protecting any element of the wind farm, therefore it is sometimes difficult to determine if it is better to remove it, or leave it. As a general rule, scour will be left in situ, but if it is considered preferable to be recovered, then it will be dredged and shipped for reuse, or to a disposal site.

If there is rock fill, the individual boulders can be collected with the help of a grab vessel, loading them on a hopper barge and transporting them for reuse or disposal. If there are frond mats, concrete aprons or other cable protections, a crane vessel is used, and their recycling can be studied [31].

### 3.1.8. Onshore elements

There is still no requirement for the decommissioning of the onshore cables from an offshore wind farm, so their complete removal might not be considered. Any onshore cables that are buried can be studied to be left in situ where appropriate, as the potential environmental impacts involved will be similar to the ones during the installation. The onshore converter substations and any other structures must be properly dismantled, restoring the land to its original state [31].

### 3.2. Cutting techniques

Extensive cutting work is required during the decommissioning of this type of projects. There are several options available, of which some have been stated previously: diamond wire cutting [33], water jetting [34], and explosives [35]. When a wind farm reaches to its decommissioning time, better techniques may be available, and will need to be studied. The options available are as follow:

- **Diamond wire.** The cut is a consequence of the friction produced by the wire against the structure. Its advantages are that there are no vibrations, it is less pollutant, it can be wrapped around almost any size or shape and it is a cost effective solution. As a drawback, it requires a good access to the cutting area
- **Water jetting.** A jet of water and an abrasive substance released at high pressure. It can cut any material and can be easily automated but components fly off and the environment is affected more. It also comprises higher costs.
- **Explosives.** A lined or unlined cavity in the explosive produces a high energy cutting jet. Low time is required and there is enough experience in controlled demolition of structures by this means. Usually non explosive methods are preferred because it increases the risks and needs a lot of planning and there is more disruption of the marine environment.

The preferred cutting technique will be diamond wire the cutting as piles should not be too complicated to wrap around, it is economical, and there is little marine disruption.

### 3.3. Destination of removed elements

A significant decision concerning the decommissioning planning is to select what to do with all the structures once they are onshore. The structures should be disassembled into the different materials they are made of, so that the material can be then processed. Where possible, a prioritisation should be done and being the option for reusing the first. If this alternative is not valid, it will be followed by recycling the materials that comprise the removed elements. As last, meaning that the other two options are not valid, disposal (landfill) [36].

### 3.4. Vessels

The logistics involved in the decommissioning process is an essential part of the planning. A methodology that comprises low risks, costs and reducing the operating time, would be ideal. There are numerous vessels that can be chartered, but there is still no single correct answer to which one(s) is/are adequate to use. The factors that influence which vessel to choose depend on the number of turbines and foundations to remove (space availability on the deck), their weight (crane capability), the site's water depth and seabed type (not all vessels can work on all seabeds), and the market availability [37]. The methodologies carried out to remove the turbines and the foundations will also need to be known to search for the best combination possible.

Apart from deciding what vessel(s) carry out the removal operations, it is important to choose an appropriate transportation strategy. This will depend principally on the distance to port and the number of wind turbines the wind farm has. There are two options [38]:

- **Multitask decommissioning vessel.** The vessel is required to do both the removal operations and the transportation of the components to port. There can be more than one vessel doing the job to reduce the decommissioning period, but the costs would also increase.
- **Decommissioning vessel and transportation vessel.** The decommissioning vessel is used only for the removal of the structures, and they are loaded into another barge that ships them to shore. There could be more than one barge so that the decommissioning vessel does not have to wait till it returns to continue working.

### 3.5. Decommissioning programmes

For the purpose of this article, all the decommissioning programmes available have been studied into detail. On the one hand, similar characteristics have been identified in the reports such as that buried cables will be left in situ, monopile foundations will be cut at a minimum depth of 1 m below the seabed and then lifted, and the same for the offshore substations' jacket foundations.

On the other hand, each wind farm has different number of wind turbines, meteorological masts, substations, distance to shore and depth, seabed materials, weather conditions and cable length [11] [40] [41]. This means that the programmes will be unique to each wind farm and will be difficult to generalise a methodology. Due to this, each wind farm will have its own schedule with different timings, and costs.

Table 2 summarises this analysis making it easier for comparison. The two factors that have been recognised to have the greatest impacts on the decommissioning programmes, need to be thoroughly studied.

#### 3.5.1. Time

A very important aspect of the decommissioning programme is how to manage and predict a correct timing for the operations to be done. The weather is one of the big challenges concerning this stage, as the environment itself can become hostile and unsafe for the personnel. The number of turbines and foundations the wind farm has, the distance to port and the methods and vessels used for the removal operations are also influencing factors. Due to this, planning has to be done precisely as high costs are involved. It is estimated that the time taken should be around 50–60% less than the installation time [42].

From Table 2 it can be seen that the activity most time

**Table 2**  
Summary table of the decommissioning programmes available. Source: Author analysis [24–31].

Wind Farm/ Specifications	Gunfleet Sands	Thanet	Lincs	Ormonde	Sheringham Shoal	Greater Gabbard	Gwynt y Môr	Dogger Bank (Teesside A&B)
<b>Commission Year</b>	2010	2010	2012	2012	2012	2013	2014	?
<b>Capacity (MW)</b>	172.8	300	270	150	316.8	504	576	2 × 1200
<b>Distance (km)</b>	8.5	11.3	8	9.5	17–23	26	13–15	131
<b>Depth (m)</b>	2–15	20–25	8–18	17–22	15–23	20–32	12–34	20–35
<b>Seabed Material</b>	Partially lithified cross-bedded sands	–	Glacial till, cretaceous chalk <sup>e</sup>	–	Soft clay, chalk	Silty clay, clayey, sandy silts, sand <sup>sl</sup>	Granular sediments, sand, glacial till	–
<b>Turbines (MW)</b>	48 × 3.6 (SWT-3.6-107)	100 × 3 (V90-3)	75 × 3.6 (SWT-3.6-120)	30 × 5 (5M)	88 × 3.6 (SWT-3.6-107)	140 × 3.6 (SWT-3.6-107)	160 × 3.6 (SWT-3.6-107)	2 × 200 x (4–10)
<b>Weight (tonnes)</b>	475	396	435	661	475	475	475	?
<b>Expected Life (years)</b>	20	20 × 2	20 × 2	–	20 × 2	25 × 2	(20–23) × 2	(20–25) × 2
<b>Meteorological Mast and Foundation Type</b>	1: Monopile	1: Monopile	1: Monopile	–	–	6: Monoopile	5: Jacket	5 + 5
<b>Weight Transition Piece (tonnes)</b>	230	–	290	500	200	300	–	?
<b>Foundation Type</b>	Steel Monopile: Cut (1 m)	Steel Monopile: Cut (2 m)	Steel Monopile: Cut (1 m)	Steel Jacket: Lifted + Cut (1 m)	Steel Monopile: Cut	Steel Monopile: Cut	Steel Monopile: Cut	?
<b>Weight (tonnes)</b>	225–423	–	225–320	250	370–500	660	200–700	?
<b>Foundational Depth into Seabed (m)</b>	27–38	–	15–30	–	23–37	30	–	–
<b>Offshore Substation</b>	1: Monopile Cut (1 m)	1: Jacket lifted + Piles Cut (2 m)	1: Jacket lifted + Piles Cut (1 m)	1: Jacket lifted + Piles Cut (1 m)	2: Monopile Cut	4: Jacket lifted + Piles Cut (1 m)	2: Jacket lifted + Piles Cut	1 + 1: ?
<b>Weight: Topside, Foundation (tonnes)</b>	1315, 414 <sup>a</sup>	1460, 820	2250, 970	900, 540	875, –	500, 850	1415, 400–1000	?
<b>Scour Material</b>	Left in situ	–	Left in situ	–	Left in situ	Left in situ	Left in situ	Left in situ
<b>Interray Cables</b>	Copper 33 kV: Left <sup>b</sup>	Copper 33 kV: Left (buried 1–2 m)	Copper 33 kV: Left	Copper 33 kV: Left (buried 0.6 m)	Copper 36 kV: Left	Copper 33 kV: Left (buried 1–1.5 m)	Copper 33 kV: Left	33 kV: Left
<b>Total Length (km), Section (mm<sup>2</sup>)</b>	36, 500/150	65, 95/300/400	85, 185/630 <sup>f</sup>	27, 150/300/500	83, 400/185	173, 150	148, 185/500	1270 + 1270, ?
<b>Export Cables</b>	Copper 1 × 132 kV: Left (buried 2 m)	Copper 2 × 132 kV: Left (buried 1–2 m)	Copper 2 × 132 kV: Left (buried 1–3 m)	Copper 1 × 132 kV: Left (buried 2 m)	Copper 2 × 145 kV: Left (buried 1 m)	Copper 4 × 132 kV: Left (buried 1–1.5 m)	Copper 4 × 132 kV: Left (buried 0.5–1 m)	2 × 2 × 132 kV: Left
<b>Total Length (km), Section (mm<sup>2</sup>)</b>	9.3, 800	51, 1000/630	96, 630	43, 800	44, 630/1000	4 × 45.57, 800	85.2, 500	2 × 260.5 + 2 × 220.2, ?
<b>Decommission Time (days)</b>	100 <sup>c</sup>	270 <sup>d</sup>	1339 <sup>g</sup>	570 <sup>i</sup>	1350 <sup>j</sup>	260 <sup>m</sup>	730 <sup>n</sup>	1095 <sup>p</sup>
<b>Costs (£/MW)</b>	–	40,000	101,200 <sup>h</sup>	–	31,900 <sup>k</sup>	–	111,000 <sup>o</sup>	–

If no data was found a “–” is used.

If it has yet not been decided a “?” is used.

In Dogger Bank there are two wind farms included (A&B).

<sup>a</sup> Foundation + transition piece.

<sup>b</sup> Remove any uncovered cables.

<sup>c</sup> Project management, planning and procurement: 40 days + Offshore decommissioning: 60 days.

<sup>d</sup> Each WTG: average of 2 days to decommission, load and transport to shore (after taking weather downtime in consideration), offshore substation: up to 3 weeks. It is probable to require 24 h working. Total: 9 months.

<sup>e</sup> Lincs seabed: The surface is made of marine deposits consisting of sandy and gravelly sediments estimated to be 1 m thick, then glacial till is found (5–13 m) and after that cretaceous chalk extends 100–200 m in depth.

<sup>f</sup> 64 km of 185 mm<sup>2</sup> and 20.5 km of 630 mm<sup>2</sup>.

<sup>g</sup> Project management, planning and procurement up to 36 months. Decommissioning operations: 259 days (163 turbines).

<sup>h</sup> Includes vessel time and ancillary activities. These costs assume the disposal costs of the bulk materials once transported to onshore equate to the scrap value of the assets. Total cost of £27,322 k.

<sup>i</sup> Project management, planning and: 180 days + Pre-survey, isolate, cut cables, remove or bury cut ends, remove exposed lengths: 25 days (plus weather window downtime) + Remove topsides, jacket and foundations: 60 days (plus weather downtime). To allow for efficient scheduling of crane vessels during appropriate weather windows, this may take place up to 360 days after all cables have been cut. Post work survey: 5 days (plus weather downtime) plus 30 days for analysis.

<sup>j</sup> Project management, planning and procurement and contract follow-up: 36 months + offshore decommissioning: 6–12 months (taken average of 9) - decommissioning of 88WTGs: 200 days.

<sup>k</sup> Expected costs are 1,415,515 kNOK for the whole wind farm in March 2014. 30% Contingency included. Exchange rate used was: 1 NOK = 0.1006 GBP.

<sup>l</sup> Stiff marine silty clay, clayey and sandy silts and subordinate sands. This formation is evident underneath the site and surrounding area to a depth of over 100 m.

<sup>m</sup> Project management, planning and procurement: 90 days + offshore decommissioning: 140 days + onshore dismantling and disposal: 170 days (run in parallel).

<sup>n</sup> 2 years: 365 × 2 days.

<sup>o</sup> The decommissioning is expected to be £40,000/MW but have a budget of £400,000/turbine.

<sup>p</sup> Including project management, planning, procurement and onshore works (dismantling and disposal: 3 years).

consuming is the project management, planning and procurement, but it is not included in all the reports. Moreover, it is questionable that the decommissioning time expected for Lincs (75 turbines) is twice the one predicted for Greater Gabbard (140 turbines). With the help of these results it can be predicted which report has been too optimistic and which has been more realistic, though it should be recognised that not all factors can be captured here (E.g: seabed bathymetry and sediment composition will both influence the ease of these operations).

### 3.5.2. Costs

The estimated cost for decommissioning an offshore wind farm is around 2–3% of the total capital cost. This means that the developer needs to save money during the life cycle of the wind farm in order to be able to pay its end of life. The middle life accrual is the preferred mechanism as funding structure, and consists of starting to save money when the wind farm is in the middle of its operational period [43].

The decommissioning has to be carefully planned because if it is required earlier than programmed, this will increase the costs (and will involve less benefit too). The availability of the vessels is a crucial factor for the planning and will determine when the decommissioning operations can be done, comprising a large amount of the costs [44]. A breakdown of the costs can be found in Fig. 3.

The removal of the foundations is found to be nearly half of the total costs, as these are very heavy structures that require complex techniques and specialised equipment. The other important value is referred to the disassembly operations, as it will have a lot of time consuming activities.

The majority of the reports do not mention costs or refer to them as confidential values. Table 2 shows a wide range of costs. This is because the costs are affected by the type of foundation, the location of the wind farm and the availability of technical expertise and equipment. The first cost prediction was of around £40,000/MW [43], but as years have passed these values have changed. DNV GL estimated in a recent study that decommissioning figures could be between €200,000–600,000/MW [39], meaning 60–70% of the

installation costs [23]. These costs are expected to decrease once experience is gained. Furthermore, it can be seen that the projected costs for Sheringham Shoal are very large compared to the others. This could be conservatism on the part of the owner/operator, a reflection of the sites complexity, or due to an error in the decommissioning programme's calculations.

## 4. Modelling decommissioning time and costs

It has been revealed that the published decommissioning programmes have very dissimilar decommissioning timings and costs per MW installed, motivating further research into the decommissioning programmes. To achieve this, a model taking into account the key variables that affect the decommissioning operations has been designed, modelling all the sites and their characteristics included in Table 2. The model is implemented in MSExcel. The modelling presented focuses on turbines and support structures. Offshore substations and cables were excluded from the model due to a lack of input data, and will be captured in future modelling activity. It is therefore expected that the model outputs will be optimistic. The two transportation strategies previously mentioned have been modelled to recognise which is best to use depending on the wind farm's characteristics.

### 4.1. Self-transportation model

The vessel chosen to perform the tasks of removing the wind farm's elements and then ship them to shore is a Wind Turbine Installation Vessel (WTIV). For the purposes of this study the specifications are: transit speed up to 10 knots, 1500 tonne lift capacity, deck capacity for 10 turbines or 8 foundations, daily price is of £150,000 and the mobilisation £300,000. With this vessel, two scenarios have been modelled: using just one WTIV and using 2 WTIVs working in parallel.

### 4.2. Multi vessel transportation model

In this case, a non-propelled Jack Up has been chosen to carry

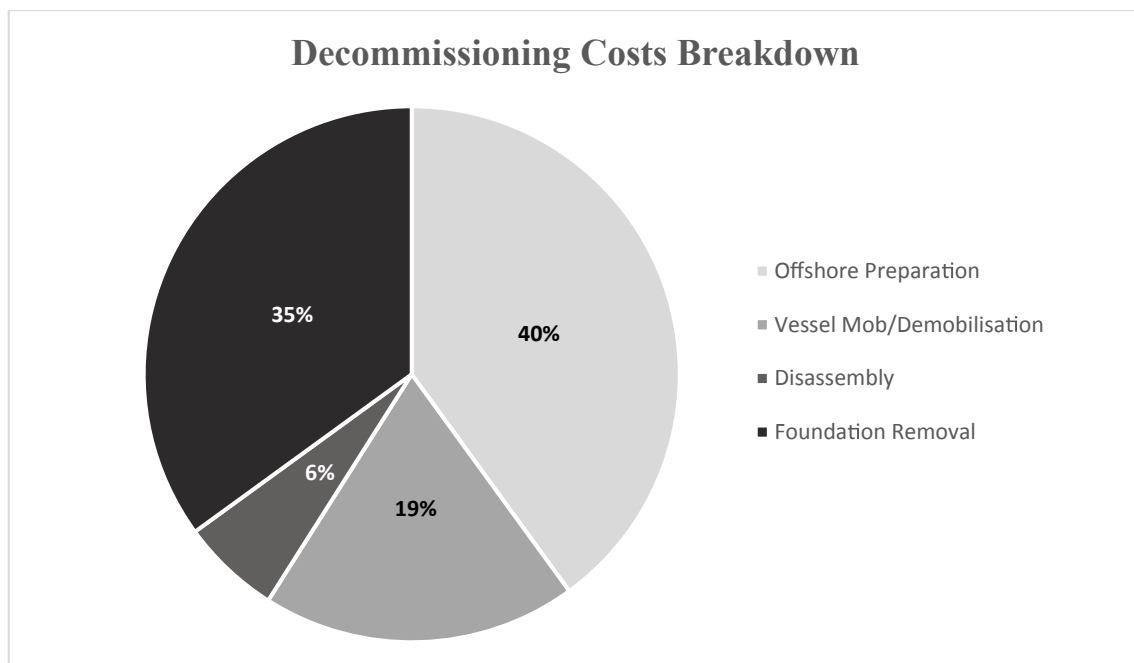


Fig. 3. Decommissioning costs breakdown. Source: [43].



out the removal operations while two barges work in parallel on the transportation. It is possible to optimise [45] the number of barges used but this is not the focus of the current study. The Jack Up has a lifting capability of 1000 tonnes, a dayrate of £75,000 and a mobilisation cost £200,000. Regarding the barges, they are assumed to have a speed of 10 knots, a capacity of 8 turbines and 6 foundations, a daily price of £50,000 and mobilisation cost of £100,000.

#### 4.3. Results: preferred transportation strategy

This model has enabled the comparison of different site characteristics and the time and costs they would comprise. Fig. 4 visualises the modelled decommissioning time for each site.

As expected Fig. 4 shows that for all sites the decommissioning time is greatly reduced 2 WTIVs are used. The only wind farm that has a greater published estimated time than the modelled one is Ormonde, meaning that their decommissioning planning could be conservative. Thanet, Lincs and Sheringham Shoal are close to the modelled result if 2 WTIVs work in parallel or if the multi vessel strategy is used. For Gunfleet Sands and Greater Gabbard, the only modelled strategy that would fit in their timing would be the 2 WTIVs. Moreover, the distances that have been used on the model do not affect notably the decommissioning time. The average decommissioning time in the reports is nearly 1 day/MW, being for one WTIV 1.34 days/MW, for multi vessels 1.27 days/MW and the least for 2 WTIVs 0.67 days/MW. Compared to the modelled times the majority of reported assumptions seem optimistic.

Fig. 5 shows the modelled decommissioning costs for each wind farm.

As previously mentioned, not all the decommissioning programmes included their expected costs, hence the comparative data in Fig. 5 are incomplete, however all sites except Sheringham Shoal have been predicted confidently. Moreover, the modelled cost for 2 WTIVs is similar to a single WTIV because there are half days to pay for but double mobilisation costs. The most expensive method is the multi vessel strategy as there are 3 vessels to pay for. Furthermore, Dogger Bank involves the least costs as there is more operation time due to the high capacity the wind farm has, and so the mobilisation costs are compensated. The average costs for all the means of transport are over £200,000/MW, which is more than the average predicted in the decommissioning programmes (£86,000/MW).<sup>1</sup>

As a result of this analysis, it has been concluded that the ideal transportation method to use is 2 WTIVs working in parallel as it has the least decommissioning time and the costs are reasonable. However, these initial results should be treated with caution before a full sensitivity analysis is carried out. This will be addressed in future work.

## 5. Summary of key results

As a result of the analysis of the whole decommissioning process, and the identification of the merits and drawbacks of numerous stages, now it can be stated the best and most sustainable methodology to follow, as well as the transportation strategy to optimise time and costs.

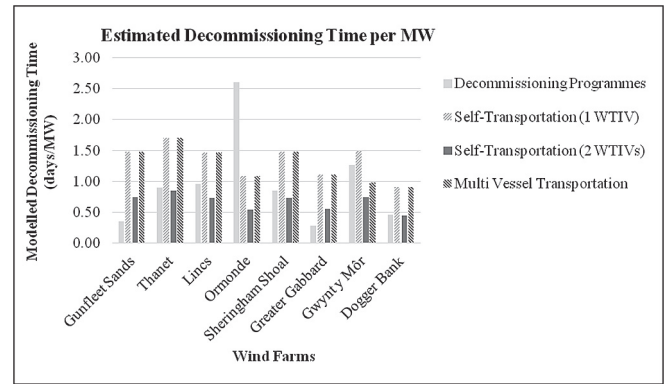


Fig. 4. Estimated decommissioning time per MW. Source: Authors Analysis.

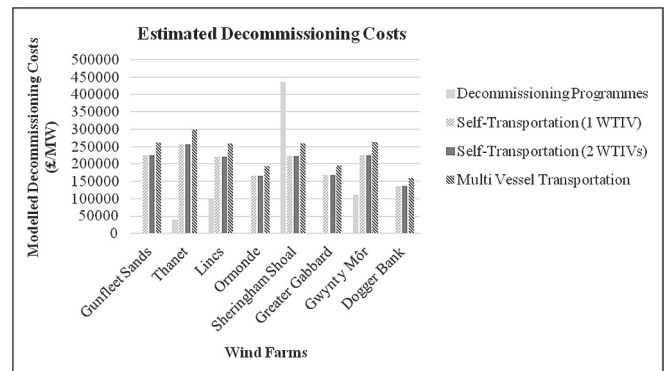


Fig. 5. Estimated decommissioning costs. Source: Authors Analysis.

### 5.1. Proposed decommissioning methodology

**Turbines:** It is known that the turbine removal operations can be delayed if there is too much wind. As the wind farms are placed in windy areas, this can be a problem. Moreover, as previously seen, the less offshore disassembling the better. Regarding this, and as there are specialised vessels nowadays, the suggested option would be to lift the turbine as a single structure. It will involve heavy lifting operations, but it will be nothing compared to the offshore substation's topside lifting (5M Senvions' turbine in Ormonde was the heaviest turbine studied with 661 tonnes, while Linc's topside was 2250). These operations will implicate high risks, but due to the similar operations being performed in the oil and gas sector, by the time decommissioning gets near, eventually there will be enough experience. No liquids (oil or any other) will be collected offshore to avoid the risk of spillage.

**Transition piece:** Lifted together with the foundation, as the total lift is estimated to be less than 1500 tonnes, being again, a smaller value than for the topside. There are specialised vessels available to perform these operations, no cutting will be required, and by the time decommissioning happens, there will be experience.

**Foundations:** Concerning the monopile and jacket foundations, they will be cut into a depth more than 1 m below the mud line, so that the environmental impact is minimised and the process becomes more sustainable. Then, they can be lifted. In the case of gravity and suction foundations, no cutting will be necessary, and will be completely lifted after their corresponding actions. As it can be seen from Table 2, the foundations installed until now, are mainly monopiles driven into the seabed at an average of around 20 m, meaning that the majority of the pile will be left in the site.

<sup>1</sup> It has to be noted that none of the vessels selected would be able to lift Lincs' topside (2250 tonnes), so a specialised heavy lifting vessel would be necessary. This vessel has an estimated dayrate of £270,000, which would increase considerably the overall costs. On the other hand, the selected Jack Up's crane capacity is also very limited, being unable to lift many of the elements. It has been assumed that when these operations are carried out, there will be more availability on the vessel's market, with improved characteristics.

**Offshore substation:** Regarding the topside, no liquids will be collected offshore (oil or resin) to reduce the spillage risk, and will be lifted as a whole piece. This can involve very heavy lifting cranes depending on the substation, as Lincs' topside (2250 tonnes). The foundation will be treated as mentioned before.

**Meteorological mast:** It will be lifted in just one piece, similar to a turbine tower. The foundation as above mentioned.

**Subsea cables:** The inter-array and export cables can be left in situ if their burial depth is more than 1 m. In the case of burial depths of less than 1 m, or unburied cables, they will be cut where they become buried to a meter, and then removed. Monitoring of the buried cables shall be done to verify that they are correctly buried, if not, actions shall be taken.

**Scour protection:** If there is any, as a general rule it will be left in situ, as life will have flourished and so it is not disturbed. If it is recognised to become a hazard, it will be dredged.

**Onshore elements:** Buried cables will be left in situ to reduce the environmental impacts and any building or structure will be completely dismantled to restore the site to its initial characteristics.

**Cutting techniques:** Diamond wire will be the preferred tool for the cutting operations as it is the least environmental harmful, can work in a wider range of monopile diameters and it is economical.

**Destination of removed elements:** The first option will be to reuse, but only turbines that are relatively new and that have still an expected life of more than 10 years. The rest will be recycled as second option. All the materials that cannot be recycled will be landfilled.

**Transportation strategy:** The results showed that the best transportation scheme was to use 2 WTIVs working in parallel, as the costs are similar to one WTIV but halving the decommissioning time. Additionally, the higher the capacity the wind farm has, the more decommissioning time it will take. As a result, the mobilisations costs will be compensated and so the overall costs would be reduced. Furthermore, there are elements that are becoming too heavy and that require specialised heavy lifting vessels.

## 6. Fields for future research

As well as with the installation process, the decommissioning will depend on many factors that are dissimilar for each site. There is still need for investigation on the main challenges concerning the decommissioning stage:

- **Turbine removal.** There are many alternatives for disassembling offshore wind turbines; ones with fewer lifts but heavier, others with more but lighter lifts. Experience is required to confirm which one could be the best ones to implement, but this will probably not have a unique solution.
- **Space optimisation.** Vessel's decks areas are limited, so an efficient planning of the use of space is required to achieve a resourceful way of transportation. An important fact that is not being considered in the decommissioning programmes is how the turbines, transition pieces and foundations, once loaded on the transportation vessel, are fitted and held. The elements can be welded onto the deck or a prefixed rack can be used, they can be positioned vertically or horizontally, but these decisions will be constrained by the stability of the vessel, the element's weight, and the existing space.
- **Planning, time scale and costs.** These are the most important factors of the process, as if any of these are not well organised, the costs can increase dramatically. The weather needs to be meticulously considered as the work is done in a hostile environment. The operations are preferred to be done during summer, trying to avoid winter. Two summers might be a better

option than operating during a whole year, but these needs further investigation as costs is an important factor.

- **Correct data management.** A lot of information is lost from stage to stage during the lifecycle of a project, and this information can be crucial reached the decommissioning stage. Due to this, an accurate management of data is something that needs to be achieved throughout the project's life.

## 7. Conclusion

There is no unique solution on which could be the best methodology to follow to decommission an offshore wind farm. Factors such as reducing time, costs and environmental impacts are the main aspects that will influence the decision on which method to carry out.

Design decisions should, as far as possible, result in installations which are affordable to install and eventually remove, but it is recognised that some elements, such as deep foundations, may nonetheless be costly to remove. Making lighter structures could ease lifting operations, but this is contrary to recent design trends for bigger turbines. On the other hand, floating foundations will simplify installation and decommissioning operations, and as a result, reduce the decommissioning costs [46].

Plans are designed on a lowest common denominator when referred to costs. This means that a 50 years lease may not imply a repowering when the time arrives. The lifetime expectancy for an offshore wind farm is between 20 and 25 years, but repowering can be studied before dismantling. This would involve removing the existing turbines (decommissioning operations) and substituting them with more potent ones which are larger and so fewer are needed. Foundations could be designed to behave greater retrofit capability and have a longer life expectancy, reusing them to place the repowered turbines. However, no existing offshore sites have been designed in this way and there is scarce data on the individual duration of components.

There is still a large amount of uncertainty when referred to the decommissioning of this sector and one of the most important factors that will influence the whole process is the life expectancy of the project. Ytre Stengrund was decommissioned after 14 years of operation [39] while Vindeby will be decommissioned after more than 25 years [4], but these are still small prototype projects. If projects do not run as long as they have been expected, this will have great impacts on the actual optimistic decommissioning planning of the wind farms and on their economics.

The availability of specialised vessels is one of the major challenges in the offshore sector. The fluidity of the price of oil makes predictions about future vessel costs extremely challenging. One way to hedge this risk would be to build a supply-demand curve for heavy lift vessels [44]. However even if oil prices remain at recent historic lows, there will be a large future demand due to oil and gas decommissioning and further marine energy construction activity.

The time taken for decommissioning activities will mainly depend on which methodologies are used in each phase as well as the selected transportation strategy. One of the most influencing factors in the decommissioning time is water depth, which influences foundation design and weight. It has been estimated that the complete removal and transportation to shore per MW is around a day, which seems to indicate that the predictions made in the published decommissioning programmes are optimistic.

The costs referred to dismantling an onshore wind turbine have been estimated to be £60,000/turbine [47]. For offshore wind they have been estimated too optimistically in £40,000/MW, but in reality this study has revealed that they could be over £200,000/MW, on the lower side. A solution to reduce these extreme expenses in

the operational phase is the sharing of vessels [37]. However, this is probably impractical for decommissioning as it is such a vessel-intensive process and involved little inactivity.

This paper has found that the published decommissioning programmes are often optimistic regarding time and cost. This is in part because the costs of decommissioning, when viewed at the start of the project (when the plan is written), are financially discounted by 20–25 years and thus initially appear small. More investigation should be carried out to reduce and/or defer these future costs, either by facilitating life extension for offshore wind assets or by much more detailed modelling and planning of decommissioning processes.

## Acknowledgements

This work was supported by the Engineering and Physical Sciences Research Council (EPSRC) with grant number EP/L016680/1.

## References

- [1] J. Welstead, R. Hirst, D. Keogh, G. Robb, R. Bainsfair, Scottish Natural Heritage Commissioned Report No. 591, Research and guidance on restoration and decommissioning of onshore wind farms, 2013. [http://www.snh.org.uk/pdfs/publications/commissioned\\_reports/591.pdf](http://www.snh.org.uk/pdfs/publications/commissioned_reports/591.pdf).
- [2] Decommissioning of Offshore Renewable Energy Installations under the Energy Act 2004, Department of Energy and Climate Change, 2011. [https://www.gov.uk/government/uploads/system/uploads/attachment\\_data/file/80786/orei\\_guide.pdf](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/80786/orei_guide.pdf).
- [3] The First Offshore Wind Farm Decommissioning Complete, 2016. The Maritime Executive. MarEx, <http://www.maritime-executive.com/article/first-offshore-wind-farm-decommissioning-complete>.
- [4] DONG announces Vindeby decommissioning – Wind Power Offshore. D. Weston, 2016. <http://www.windpoweroffshore.com/article/1382887/dong-announces-vindeby-decommissioning>.
- [5] Vattenfall Starts First Ever Offshore Wind Farm Dismantling, The Norwegian Wind Energy Association (NORWEA), 2015. <http://www.norwea.no/nyhetsarkiv/visning-nyheter/vattenfall-starts-first-ever-offshore-wind-farm-dismantling.aspx?PID=1145&Action=1>.
- [6] Wind Energy Regions: Denmark – South Baltic Offshore Wind Energy Regions. <http://www.southbaltic-offshore.eu/regions-denmark.html>.
- [7] C. Januário, S. Semino, M. Bell, Offshore Windfarm Decommissioning: a Proposal for Guidelines to be Included in the European Maritime Policy, 2007. [https://www.researchgate.net/publication/228636135\\_Offshore\\_Windfarm\\_Decommissioning\\_A\\_proposal\\_for\\_guidelines\\_to\\_be\\_included\\_in\\_the\\_European\\_Maritime\\_Policy](https://www.researchgate.net/publication/228636135_Offshore_Windfarm_Decommissioning_A_proposal_for_guidelines_to_be_included_in_the_European_Maritime_Policy).
- [8] E. Lantz, M. Leventhal, I. Baring-Gould, Wind Power Project Repowering: Financial Feasibility, Decision Drivers, and Supply Chain Effects, National Renewable Energy Laboratory, 2013. <http://www.nrel.gov/docs/fy14osti/60535.pdf>.
- [9] The First Decommission in the World of an Offshore Wind Farm Is Now Complete, Vattenfall Press Release, 2016. <https://corporate.vattenfall.com/press-and-media/press-releases/2016/the-first-decommission-in-the-world-of-an-offshore-wind-farm-is-now-complete/>.
- [10] Lorc Knowledge – List of Offshore Wind Farms. <http://www.lorc.dk/offshore-wind-farms-map/list>.
- [11] Telford, Stevenson, MacColl Wind Farms and associated Transmission Infrastructure Environmental Statement, Technical Appendix 1.3 E: Preliminary Decommissioning Programme – Moray Offshore Renewables Ltd. [http://77.68.107.10/Renewables%20Licensing/EDPR\\_UK\\_and\\_REPSOL\\_Offshore\\_Windfarm/ES/Volumes%20to%2011%20-%20Technical%20Appendices/Volume%208%20-%20The%20Project%20Technical%20Appendices/Appendix%201.3%20E%20-%20Preliminary%20Decommissioning%20Programme.pdf](http://77.68.107.10/Renewables%20Licensing/EDPR_UK_and_REPSOL_Offshore_Windfarm/ES/Volumes%20to%2011%20-%20Technical%20Appendices/Volume%208%20-%20The%20Project%20Technical%20Appendices/Appendix%201.3%20E%20-%20Preliminary%20Decommissioning%20Programme.pdf).
- [12] Offshore Wind Operational Report, 2015. The Crown State, <http://www.thecrownstate.co.uk/media/5462/ei-offshore-wind-operational-report-2015.pdf>.
- [13] Counting Costs – Decommissioning an offshore wind farm assets. Renewables Consulting Group. S. Freeman. <http://renewablescg.com/wp-content/uploads/2015/12/Counting-Costs-Decommissioning-of-offshore-wind-farm-assets.pdf>.
- [14] Decommissioning – Oil & Gas UK. [http://www.oilandgasuk.co.uk/economic\\_report/decommissioning.cfm](http://www.oilandgasuk.co.uk/economic_report/decommissioning.cfm).
- [15] L. SmågeBreidablikk, Heavy Lift Methods in Decommissioning Installations, Norwegian University of Science and Technology Department of Marine Technology, 2010. <https://core.ac.uk/display/30857507>.
- [16] E. Uraz, Offshore Wind Turbine Transportation & Installation Analyses: Planning Optimal Marine Operations for Offshore Wind Projects, Gotland University, 2011. <http://www.diva-portal.se/smash/get/diva2:691575/FULLTEXT01.pdf>.
- [17] M.C. O'Hara, The legal and regulatory framework governing offshore decommissioning, *Constr. Law J.* 31 (3) (2015) 122–138.
- [18] M.J. Kaiser, B.F. Snyder, *Offshore Wind Energy Cost – Installation and Decommissioning*, Springer, 2012.
- [19] O. Yanguas Miñambres, Assessment of Current Offshore Wind Support Structures Concepts: Challenges and Technological Requirements by 2020, Karlshochschule International University, 2012. [http://e-archivo.uc3m.es/bitstream/handle/10016/16597/PFC\\_Oscar\\_Yanguas\\_Minambres.pdf?sequence=5](http://e-archivo.uc3m.es/bitstream/handle/10016/16597/PFC_Oscar_Yanguas_Minambres.pdf?sequence=5).
- [20] C. Birkeland, Assessing the Life Cycle Environmental Impacts of Offshore Wind Power Generation and Power Transmission in the North Sea, Norwegian University of Science and Technology Department of Energy and Process Engineering, 2011. <http://daim.idi.ntnu.no/masteroppgaver/006/6222/masteroppgave.pdf>.
- [21] Life Cycle Assessment of Offshore and Onshore Sited Wind Farms, Elsam Engineering, 2004. [http://www.apere.org/manager/docnum/doc/doc1252\\_LCA\\_V80\\_2004\\_uk%5B1%5D.fiche%2042.pdf](http://www.apere.org/manager/docnum/doc/doc1252_LCA_V80_2004_uk%5B1%5D.fiche%2042.pdf).
- [22] S. Properzi, H. Herk-Hansen, Life cycle assessment of a 150 MW offshore wind turbine farm at Nysted/Roedsand, Denmark – energi E2, in: European Wind Energy Conference and Exhibition, Copenhagen, (Denmark), 2001. [https://tethys.pnnl.gov/sites/default/files/publications/Middelgrund\\_LCA\\_2001.pdf](https://tethys.pnnl.gov/sites/default/files/publications/Middelgrund_LCA_2001.pdf).
- [23] Decommissioning: Should they stay or should they go? J. Dodd, *WindPower Monthly*, 2015. <http://www.windpowermonthly.com/article/1349270/decommissioning-stay-go>.
- [24] Gunfleet Sands Decommissioning Plan – Dong Energy, 2012. <http://assets.dongenergy.com/DONGEnergyDocuments/Gunfs/DecommissioningPlan.pdf>.
- [25] Thanet Offshore Wind Farm Decommissioning Plan, 2008. <https://corporate.vattenfall.co.uk/globalassets/uk/projects/decommissioning-plan-2008.pdf>.
- [26] Lincs Offshore Wind Farm Decommissioning Plan, 2010. [https://www.centrica.com/files/pdf/centrica\\_energy/lincs\\_offshore\\_wind\\_farm\\_decommissioning\\_plan.pdf](https://www.centrica.com/files/pdf/centrica_energy/lincs_offshore_wind_farm_decommissioning_plan.pdf).
- [27] TC Ormonde OFTO Ltd Decommissioning Programme, 2013. <http://www.transmissioncapital.com/pdf/BD%20ORM%20TEC%20002-%20Ormonde%20OFTO%20Decom%20Plan%20for%20Publication.pdf>.
- [28] Statoil Decommissioning Programme Sheringham Shoal – Scira Offshore Energy, 2014. [http://www.scira.co.uk/downloads/Decommissioning%20Programme%20SCIRA%20SC-00-NH-F15-00005\\_07.pdf](http://www.scira.co.uk/downloads/Decommissioning%20Programme%20SCIRA%20SC-00-NH-F15-00005_07.pdf).
- [29] Decommissioning Programme – Greater Gabbard Offshore Wind Farm Project. [http://sse.com/media/92981/GGOWL\\_DecommissioningProgramme.pdf](http://sse.com/media/92981/GGOWL_DecommissioningProgramme.pdf).
- [30] Decommissioning Strategy Gwynt y Môr Offshore Wind Farm Ltd – RWE Npower Renewables Ltd, 2011. <https://www.rwe.com/web/cms/mediablob/en/1268920/data/1202906/2/rwe-innogy/sites/wind-offshore/in-operation/gwynt-y-mr/English.pdf>.
- [31] Dogger Bank Creyke Beck Outline Decommissioning Statement – Forewind, 2013. [http://www.forewind.co.uk/uploads/files/Creyke\\_Beck/Application\\_Documents/8.3\\_Decommissioning\\_Statement\\_F-DVC-SP-001\\_FINAL\\_10-08-13.pdf](http://www.forewind.co.uk/uploads/files/Creyke_Beck/Application_Documents/8.3_Decommissioning_Statement_F-DVC-SP-001_FINAL_10-08-13.pdf).
- [32] K. Smyth, N. Christie, D. Burdon, J.P. Atkins, R. Barnes, M. Elliott, Renewables-to-reefs? Decommissioning Options for the Offshore Wind Power Industry, *Elsevier Marine Poll. Bull.* 90 (2015) 247–258.
- [33] Diamond Wire Cutting – Castle and Pryor. <http://www.castle-pryor.co.uk/services/wire-sawing>.
- [34] Evaluation, Selection and Development of Subsea Cutting Techniques, AME Ltd., 1997. <http://www.hse.gov.uk/research/othpdf/200-399/oth349.pdf>.
- [35] E.K. Lauritzen, J.F. Gjørdvad, C. Gormsen, Decommissioning of offshore structures by means of explosives – NIRAS, in: Decommissioning Conference, Esbjerg (Denmark), 2007.
- [36] S. Bradley, End of Life Opportunities, Energy Technology Institute, 2014. <http://www.eti.co.uk/wp-content/uploads/2014/06/End-of-life-for-offshore-wind-EI-June-2014UPDATED.pdf>.
- [37] Jack-up Vessel Optimisation – the Crown State, 2014. <http://www.thecrownstate.co.uk/media/451536/ei-km-in-om-construction-072014-jack-up-vessel-optimisation.pdf>.
- [38] Offshore Infrastructure: Ports and Vessels – Offshore Renewable Energy Conversion Platforms Coordination Action. [http://www.orecca.eu/c/document\\_library/get\\_file?uuid=6b6500ba-3cc9-4ab0-8bd7-1d8fdd8a697a&groupId=10129](http://www.orecca.eu/c/document_library/get_file?uuid=6b6500ba-3cc9-4ab0-8bd7-1d8fdd8a697a&groupId=10129).
- [39] K. Chamberlain, Offshore Operators Act on Early Decommissioning – Wind Energy Update, 2016. <http://analysis.windenergyupdate.com/offshore/offshore-operators-act-early-decommissioning-data-limit-costs>.
- [40] The Wind Power Database. <http://www.thewindpower.net/>.
- [41] 4C Offshore Database. <http://www.4cshore.com/windfarms/>.
- [42] G. Jackson, Offshore wind decommissioning, *Constr. Law J.* 31 (3) (2015) 148–151.
- [43] Offshore Renewable Energy Installation Decommissioning Study – Climate Change Capital. [https://www.gov.uk/government/uploads/system/uploads/attachment\\_data/file/47955/900-offshore-renewable-installation-decom.pdf](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/47955/900-offshore-renewable-installation-decom.pdf).
- [44] Forecasting Long Term Jack up Vessel Demand for Offshore Wind. D. McMillan & I. Dinwoodie. [https://pure.strath.ac.uk/portal/files/27312713/mcmflt\\_v3.pdf](https://pure.strath.ac.uk/portal/files/27312713/mcmflt_v3.pdf).
- [45] E. Barlow, D.T. Öztürk, M. Revie, E. Boulougouris, A.H. Day, K. Akartunali, Exploring the impact of innovative developments to the installation process for an offshore wind farm, *Ocean Eng.* 109 (2015) 623–634.
- [46] A. Myhr, C. Bjerkseter, A. Ågotnes, T.A. Nygaard, Levelised Cost of Energy for Offshore Floating Wind Turbines in a Life Cycle Perspective, *Elsevier Renew. Energy* 66 (2014) 714–728.
- [47] Onshore Wind: Direct and Wider Economic Impacts – Renewable UK, 2012. [https://www.gov.uk/government/uploads/system/uploads/attachment\\_data/file/48359/5229onshore-wind-direct-wider-economic-impacts.pdf](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/48359/5229onshore-wind-direct-wider-economic-impacts.pdf).